

**DO NOT USE THIS DIGITAL COLOR CHART FOR COLOR MATCHING.**

This digital color chart is intended to be viewed on computer monitors to show a wide range of colors available. Colors will vary depending on your computer monitor and monitor settings. Please ask for a physical color chart to view colors, and a metal sample for color matching purposes.



Smoke

Slate Gray

Ash

Brite



Choose CentralGuard for the best protection and a lifetime warranty

# Architectural

## Color Selection Tool

24 GAUGE  
FLUROPON® 70% PVDF



centralstatesmfg.com

SHERWIN-WILLIAMS  
Coil Coatings



Check our website to verify which colors meet ENERGY STAR® requirements for steep slope roofs.

Evergreen




Verdigris




Autumn



Dark Bronze




Bronze



Terratone



Tudor




Sand



Galvalume®†

Clear acrylic coating



† Weathering and appearance variation, including color, sheen, and spangle, is common in non-painted materials and is not a cause for rejection. For consistent appearance, choose a paint-finished product. Colors on this chart are close representations of actual metal color, limited by printing and viewing conditions. Color matching is optimized for outdoor viewing.

# Choose an energy efficient paint finish.

Solar Reflectivity is the metal panel's ability to reflect sunlight. This characteristic of metal roofing is the most important in terms of energy savings. Cool metal roofing reflects much of the sun's rays, making the surface of the metal much cooler than material with a lower solar reflectivity rating.

Emissivity is the metal panel's ability to release absorbed heat. A low emissivity rating means the material will be hot to the touch (it doesn't release the heat), while material with a higher emissivity rating will be cooler to the touch. Therefore, metal with a low emissivity rating retains heat and may be more desirable for a cooler climate, while a high emissivity rating reflects heat and is more effective for saving energy in a warmer climate.


COLOR	INITIAL SOLAR REFLECTIVITY	INITIAL EMISSIVITY	SRI VALUE
Ash	0.32	0.83	36
Autumn	0.21	0.87	19
Brite	0.55	0.83	78
Bronze	0.25	0.83	26
Dark Bronze	0.25	0.83	26
Evergreen	0.27	0.85	26
Galvalume® (Acrylic Coated)	0.77	0.08	72
Sand	0.35	0.75	54
Slate Gray	0.18	0.87	15
Smoke	0.25	0.83	33
Terratone	0.32	0.83	33
Tudor	0.29	0.88	30
Verdigris	0.32	0.83	41

Solar reflectance values are determined by means of a solar spectrum reflectometer in accordance with ASTM C 1549. 3-year results are not available. Thermal emittance values are determined in accordance with ASTM C 1371 SRI is calculated in accordance to ASTM E 1980 with medium wind speed. Laboratory and Exposure sites are ISO 17025 Accredited, Laboratory is also EPA Accredited. Panels are unwashed.

For information on energy savings, visit [www.centralstatesmfg.com/energy-savings](http://www.centralstatesmfg.com/energy-savings)

## Central-Loc® - 3" Snap-lock

Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'

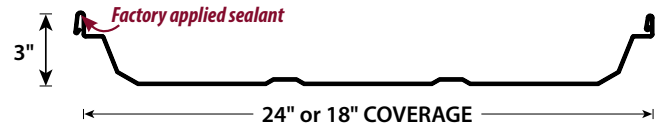

## Central Seam Plus® - 3" Mechanically Seamed Structural

Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'




## Central Span™ - 2" Mechanically Seamed Structural

Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'



## Central Snap® - 1 3/4" Snap-lock

Recommended min. pitch - 1:12 | Non-structural panel perfect for light commercial applications.



## Precision-Loc™ - 1" Soffit and Wall Panel

Concealed fastener panel with clean lines that complement a building's walls and soffits.

